



STANDING SEAM


This seam ensures structural integrity and stability..



METFOLD
SHEET METAL

OVERVIEW

Standing Seam is a joint or connection point where two metal sheets meet. and it is an ancient and elegant roofing system offers versatility for facades or roofing, suitable for flat, curved, concave, convex, conical, and domed applications. It utilizes two overlapping panel seams, crimping each panel securely together to establish a strong seal

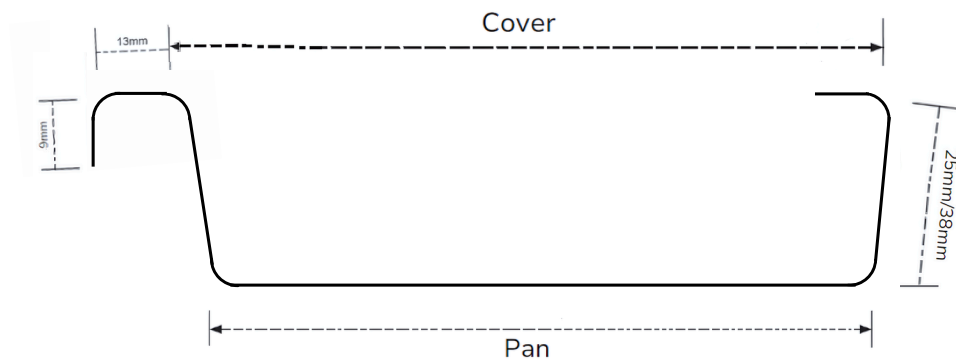


PRODUCT SPECIFICATIONS

Rib Height available	25mm, 38mm
Minimum roof pitch:	3 degrees
Min / Max Length	8m - (4m recommended)
Cover widths for 25mm	230mm, 330mm & 530mm
Cover widths for 38mm	210mm, 310mm & 510mm
Stop end and/ or hook	fold up, fold down, fold hook
Material	Colorbond, Colorbond Matt, Colorbond Ultra, Zinalume, Galvanized, UNICOTE LUX


SINGLE PANEL SHEET PROFILE

Our Standing Seam metal roofing system combines aesthetics with practical benefits. Its narrow ribs, wide spacing, and concealed fasteners ensure durability, security, and a refined appearance. With a variety of colors and finishes available, it's a top choice for achieving high aesthetic standards in roofing and cladding.

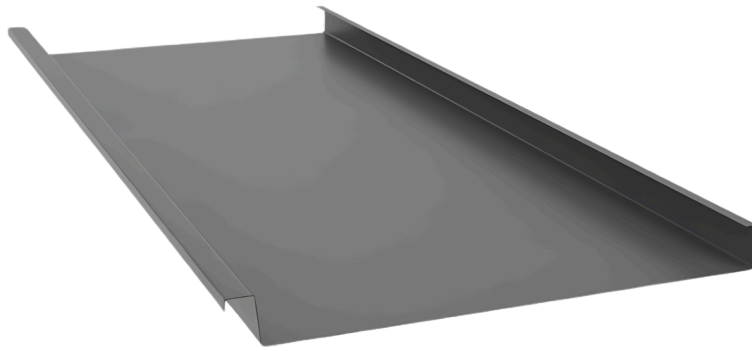

FASTENER SPECIFICATIONS

Fasteners need to be screwed through the slotted holes on the stainless countersunk clips

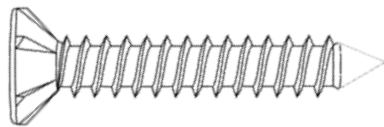

8g x 25mm

Basically, two types of clips are used in installation of standing seam cladding sheets they are Fixed and Sliding Clips.



Fixed Clips



Sliding Clips

Discover the perfect cladding solution for your project. Contact us today!